# GEARBOX TYPE: Q 200-S

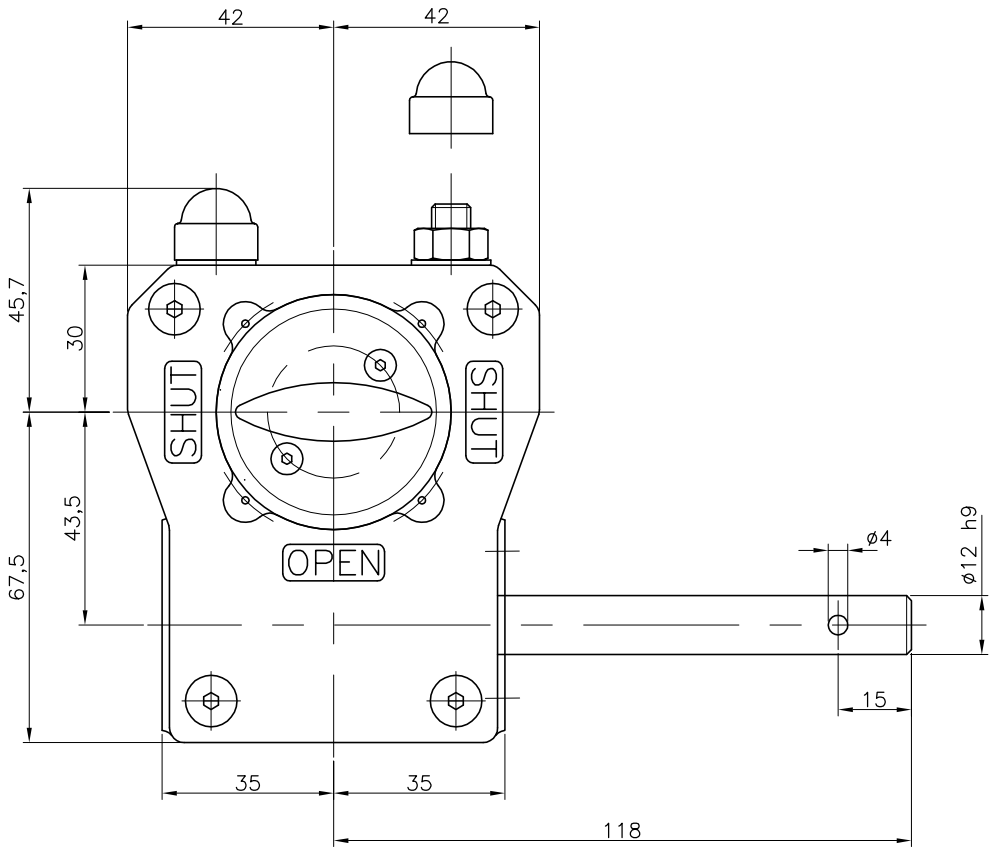


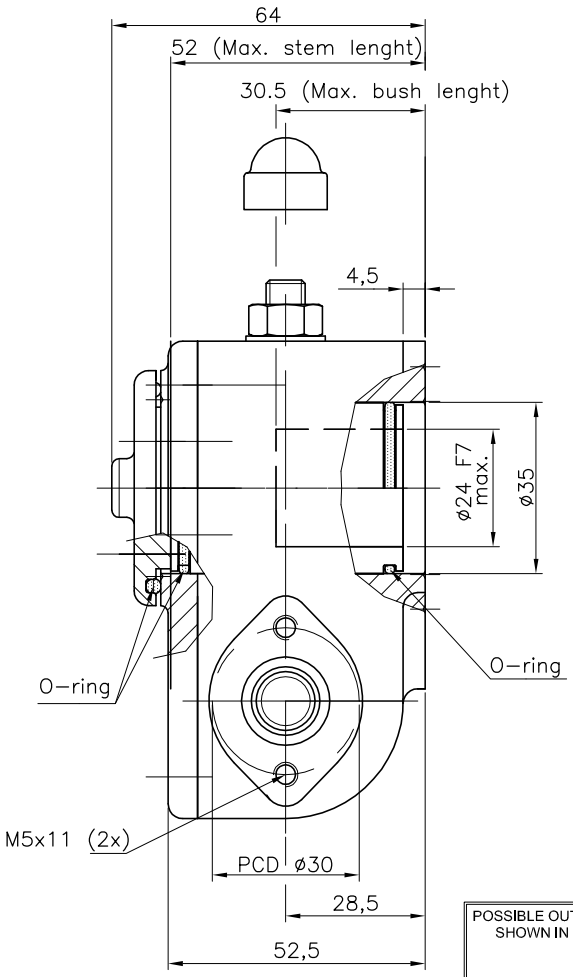





| TECHNICAL DATA | | | |
|---|---|---|---|
| NAME | | : | Q-200 S |
| Travel | | : | 90° ±5° at both ends |
| RATIO | | : | 40 : 1 (quarter turn) |
| TURNS TO CLOSE | | : | 10 |
| APPROX. WEIGHT | | : | 2 kg. ( 4.41lb.) excl. bore and handwheel |
| MAX. INPUT TORQUE | | : | 16.8Nm (12.39 lbf.ft.) |
| MAX. OUTPUT TORQUE | | : | 200 Nm (147.51lbf. ft.) |
| MECH. ADV. | | : | 11.9% (+/- 10%) (Values measured by fully loaded gearbox) |
| **MOUNTING DETAILS** | | | |
| BOLT CIRCLE | MIN. | : | ø50 [1.97] 4x M6 (F05) |
| | MAX. | : | ø70 [2.75] 4x M8 (F07) |
| BORE | MIN. | : | ø8.4 (pilot-bore) or []8.0 [0.31] |
| | MAX. | : | ø24 [0.94] or []14 [0.55] |

No rights can be obtained from this drawing
Drawing can be changed without notice

Pro-Gear

| dimension in MM. | Drawing number : | Revision : |
|---|---|---|
| Scale : none | DC-200-S-01 | 06 |

15-01-09

This document is property of PRO-GEAR GmbH. Neither this or its content may be copied or used in any other way detrimetal to the interest of PRO-GEAR, acceptance of this document shall constitute acknowledgement of the foregoing conditions